



Indice / Contents

Válvulas CETOP 7 / CETOP 7 Valves.....			37
SWH G04.....	38	MT 04 A/B/W.....	41
MPR 04.....	40	MPC 04.....	42
Válvulas CETOP 8 / CETOP 8 Valves.....			43
SWH G06.....	44	MT 06 A/B/W.....	47
MPR 06.....	46	MPC 06.....	48
Válvulas CETOP 10 / CETOP 10 Valves.....			49
SWH G10.....	50		

SWH G04




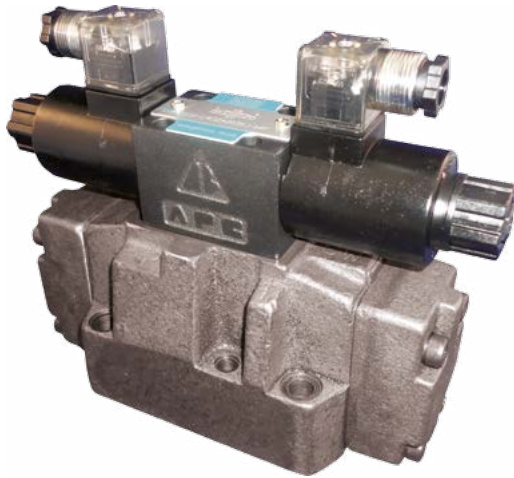


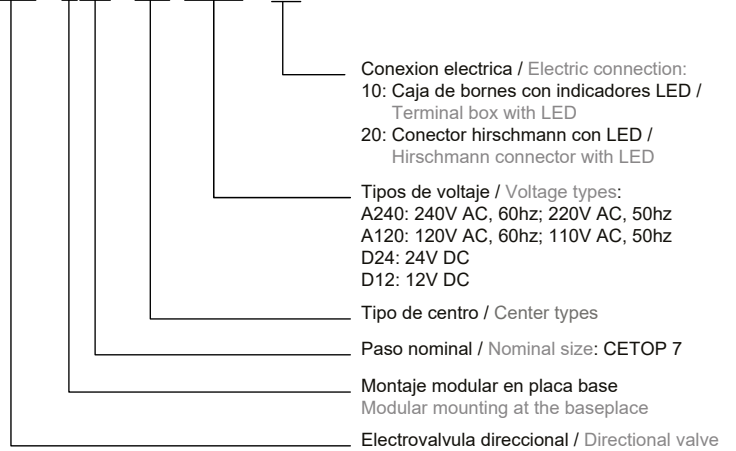







SWH - G04 - C2 - A220 - 10 - 31J












Datos Principales Main Data

Temp. de trab. / Working Temp: 5°C - 60°C
Visc. de aceite / Oil viscosity: 15 - 300 cst
Filtración / Filtering: 25 micras


Presión de trabajo (P/A/B) Work Pressure	350 bar
---	---------

Éstandar Standard		Inversa Inverted	
Esquemas Schemes	Referencias P/N	Esquemas Schemes	Referencias P/N
	C2B		C2BS
	C3B		C3BS
	C4B		C4BS
	C40B		C40BS
	C5B		C5BS
	C6B		C6BS






	Esquemas Schemes	Referencias P/N	Caudal Máx. Max flow
2 posiciones centrada por muelle		SWH-G04-B2	300
		SWH-G04-B3	
2 positions spring-cente- red		SWH-G04-B20	
		SWH-G04-C2	
3 posiciones centrada por muelle		SWH-G04-C3	
		SWH-G04-C4	
		SWH-G04-C40	20 - 40
3 positions spring-cente- red		SWH-G04-C5	
		SWH-G04-C6	

SWH G04

CON SOLENOIDES
AC (PILOTO)

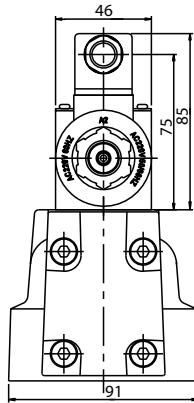


CON SOLENOIDES
DC (PILOTO)

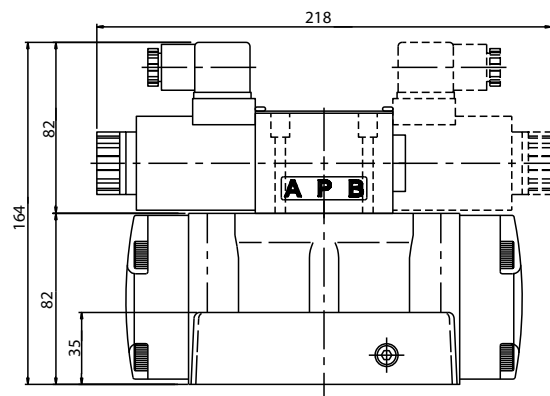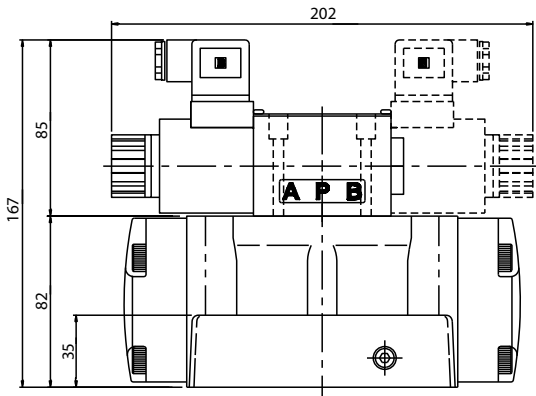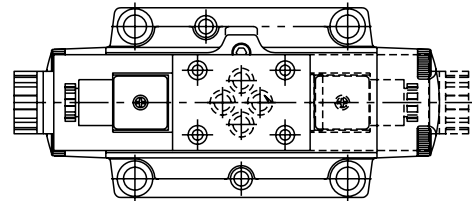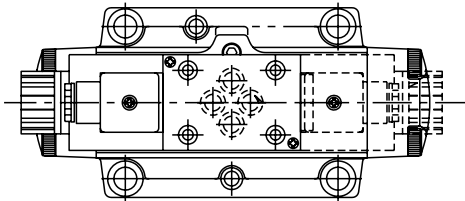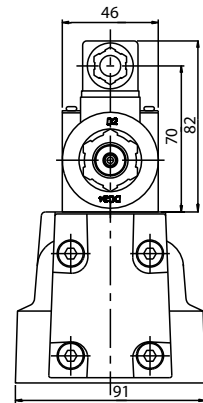

MPR 04




MPR - 04 P - K - 0 - 30 - N

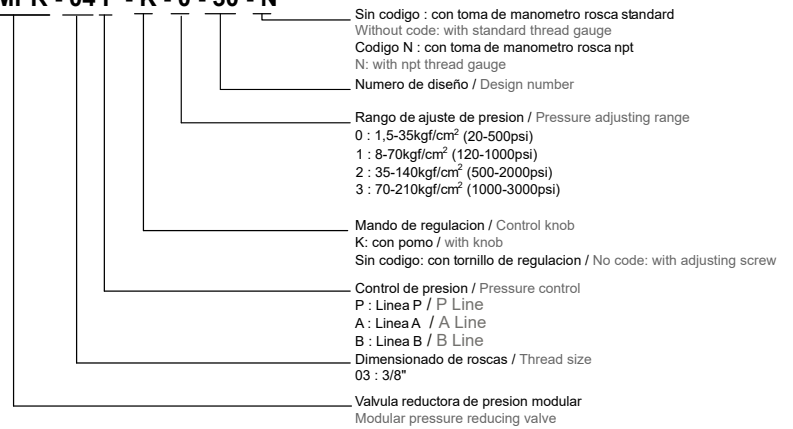


Datos Principales Main Data

Presión operativa máxima / Maximum working pressure: 250 kgf/cm³
Caudal Máximo / Max flow: 50LPM (13,1 GPM)


Viscosidad del aceite / Oil viscosity: 35 cst (175 ssu)
Temperatura / Temperature: 50° c (122° f)






P T A B
MPR-04P



P T A B
MPR-04A



P T A B
MPR-04B

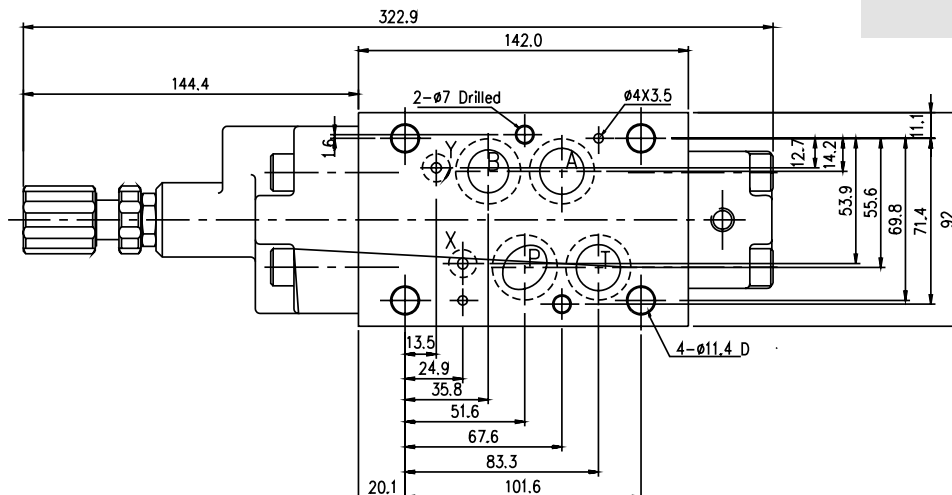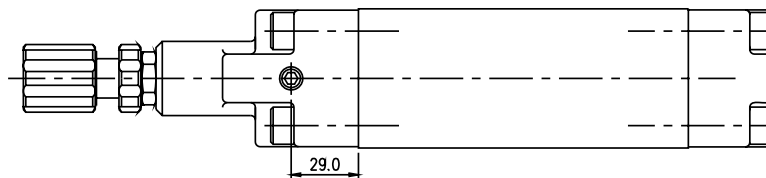

MT 04 A/B/W












MT - 04 W - K - I - 30

- Numero de diseño / Design number
- Direccion de la regulacion del caudal / Flow regulation direction
I: en entrada / at input
Sin codigo: en salida / at output
- Mando de regulacion / Control knob
K: con pomo / with knob
Sin codigo: con tornillo de regulacion / No code: with adjusting screw
- Regulacion de caudal / Flow control
A : Linea A / A Line
B : Linea B / B Line
W : Lineas A Y B / A and B lines
- Dimensionado de roscas / Thread size
04 : 1/2"
- Valvula reguladora unidireccional modular
Modular unidirectional flow regulator

Datos Principales Main Data

Presion operativa maxima / Maximun working pressure: 250 kgf/cm³
Caudal Maximo / Max flow: 50LPM (13,1 GPM)

Viscosidad del aceite / Oil viscosity: 35 cst (175 ssu)
Temperatura / Temperature: 50° c (122° f)

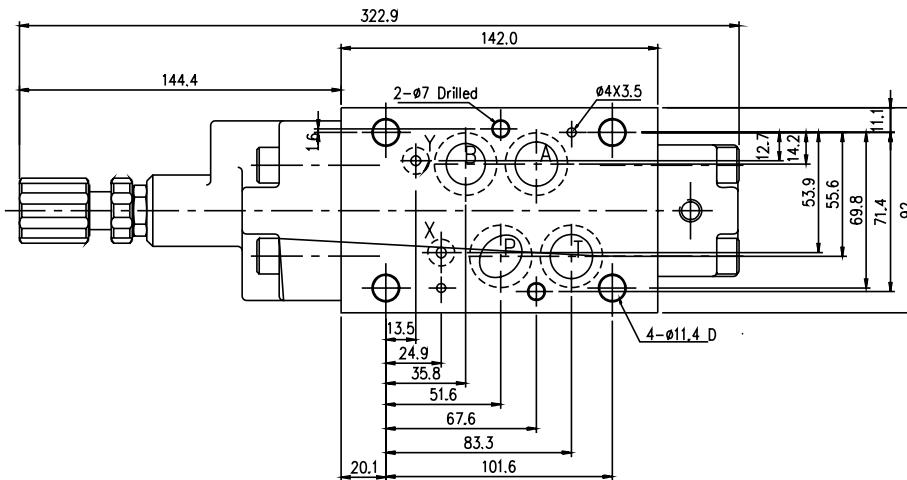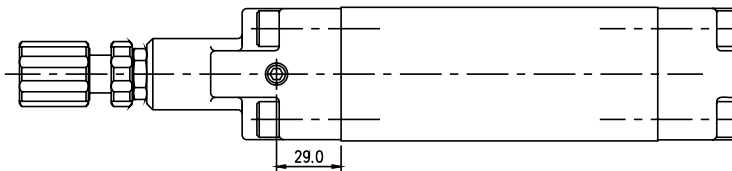

MPC 04




MPC - 04 W - 30

- Numero de diseño / Design number
- Posicion del antirretorno / Non-return position
A : Linea A / A line
B : Linea B / B line
W : Lineas A Y B / A and B lines
- Dimensionado de roscas / Thread size
04 : 1/2"
- Valvula antirretorno pilotada modular CETOP 3
CETOP 3 piloted modular check valve


Datos Principales Main Data

Presion operativa maxima / Maximun working pressure: 250 kgf/cm³
Caudal Maximo / Max flow: 50LPM (13,1 GPM)


Viscosidad del aceite / Oil viscosity: 35 cst (175 ssu)
Temperatura / Temperature: 50° c (122° f)

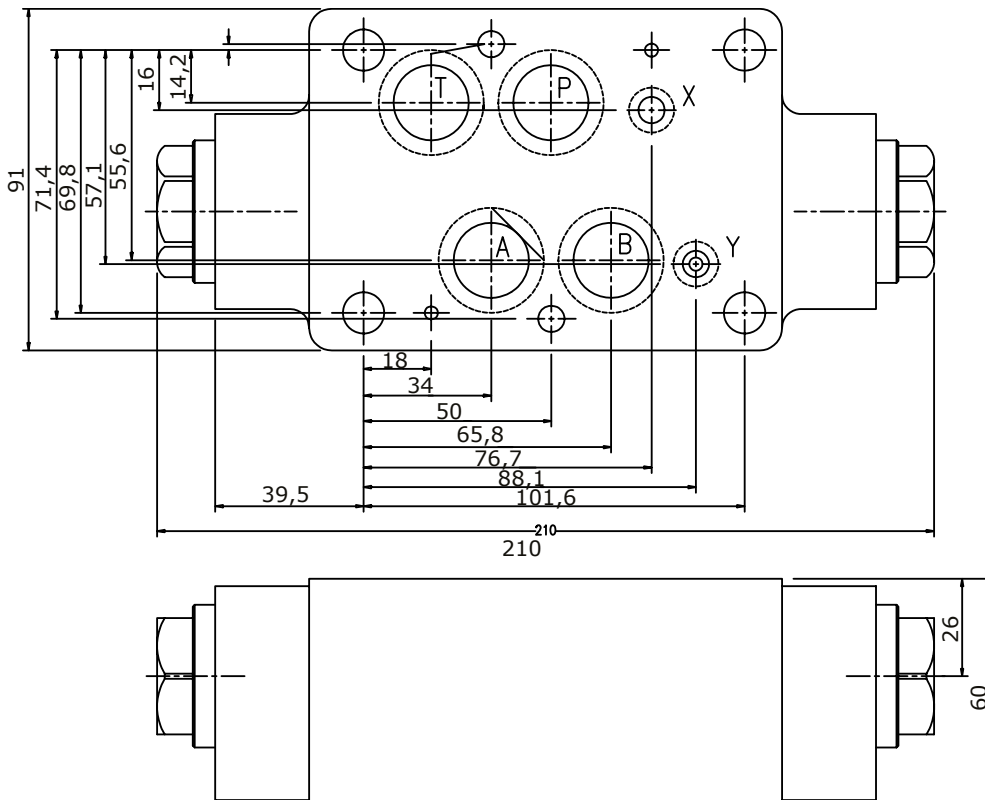

P T B A
MPC-04A



P T B A
MPC-04B



P T B A
MPC-04W